

Lumistar Direct View Mirror


Straight through sight glass: used for observing the flow of liquid in pipelines such as reflux and cooling water before draining or receiving tanks.

Valve body material: available in various types such as carbon steel, stainless steel, rubber lining, fluorine lining, etc

Nominal pressure range: 10, 16, 25, 40, 64/100 kilograms.

Working temperature: $\leq$ Below 300 ° C,

Nominal diameter: What temperature, pressure, and model can be customized non-standard for DN15 -DN200.

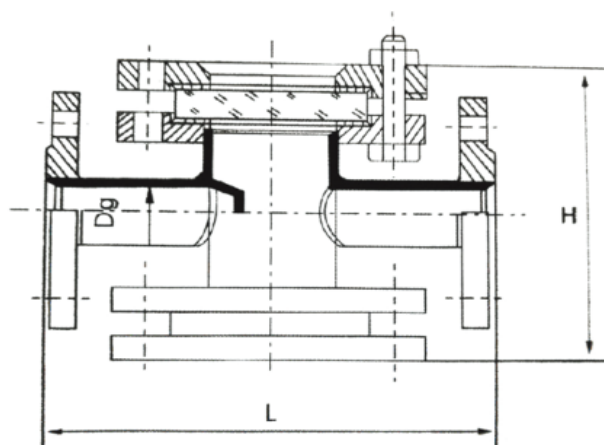

Main connection dimensions

Pg= 10 kg/cm ²						
Nominal diameter Dg		External dimensions		Glass plate		Weight (kg)
in	mm	L	H	diameter	thickness	
1/2"	15	200	130	65	10	4.5
3/4"	20	200	130	65	10	5
1"	25	200	130	65	10	5.5
1 1/4"	32	260	180	95	15	9.2
1 1/2"	40	260	190	95	15	9.7
2"	50	320	210	140	20	17
2 1/2"	65	320	235	140	20	19
3"	80	360	250	165	20	24
4"	100	360	270	165	20	26
5"	125	440	295	165	20	32
6"	150	440	335	165	20	36
8"	200	480	380			