

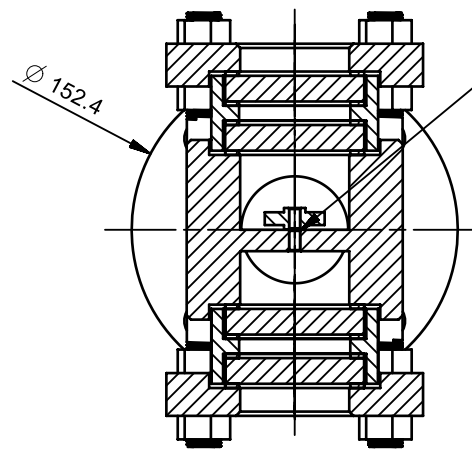
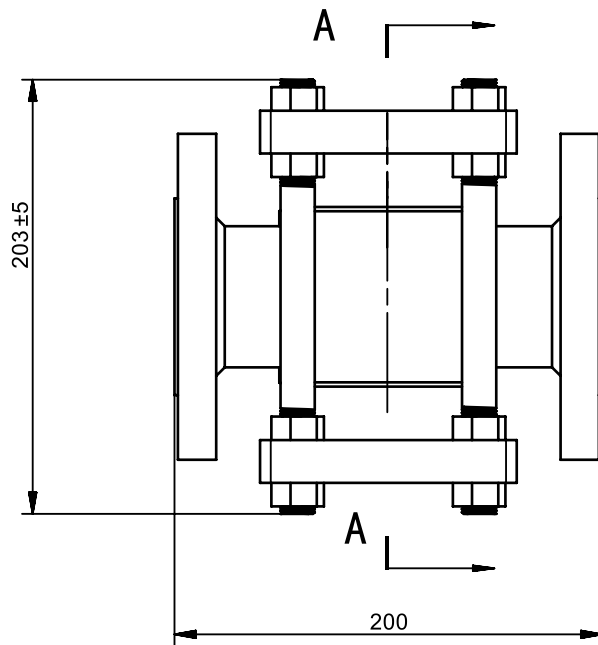


Lumistar Special Glass Technology Co., Ltd.
 Sophia
 Email: sophia@js-lumiglas.com

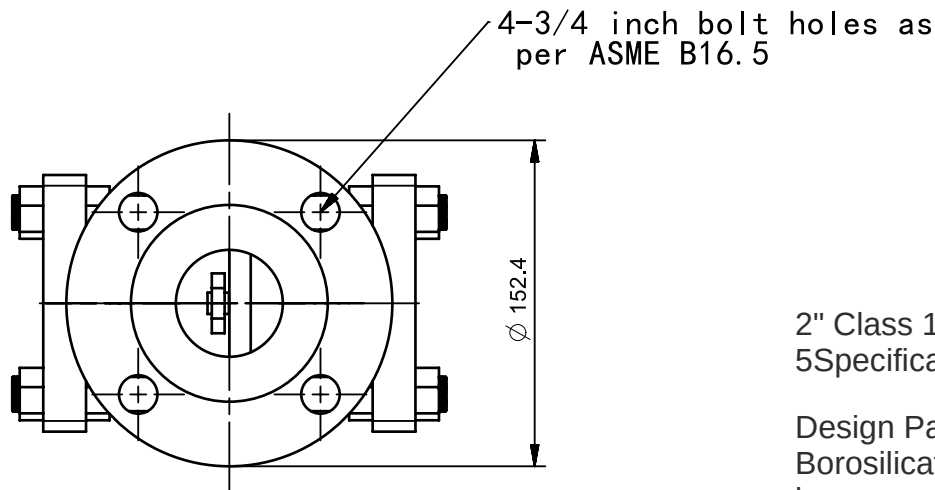

SECTION A-A

316SS Rotor Indicator

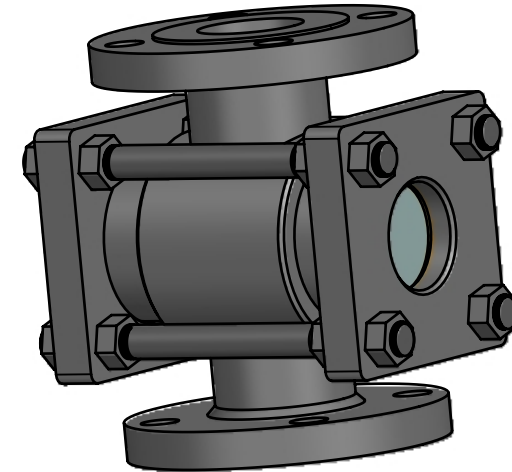


2" Class 150 Dual Window Sight Flow Indicator Execution standard: ASME B16.5
 Specification: 2" - 150lb

Design Parameter Note: We confirm the provided 316SS body and Tempered Borosilicate assembly are fully compatible with BB5 PMS rating: -28.9°C @ 18.76 bar.

522-8J80-SP-A-073, 522-8K80-SP-A-073

BILL OF MATERIALS

No	Name of part	Qty	Material	Max(Temp.(° F))	MaterialGrade/Notes
01	Body	1	316SS		ASTM A351 GR.CF8M
02	Cover	2	316SS		ASTM A351 GR.CF8M
03	Lens	4	Tempered Borosilicate	500	
04	Gasket	8	PTFE	350	
05	Studs	4	316SS		ASTM A193-B8M2
06	Nuts	16	316SS		ASTM A194-8M
07	Rotor	1	316SS		
08	Retainer	2	316SS		A351-CF8M

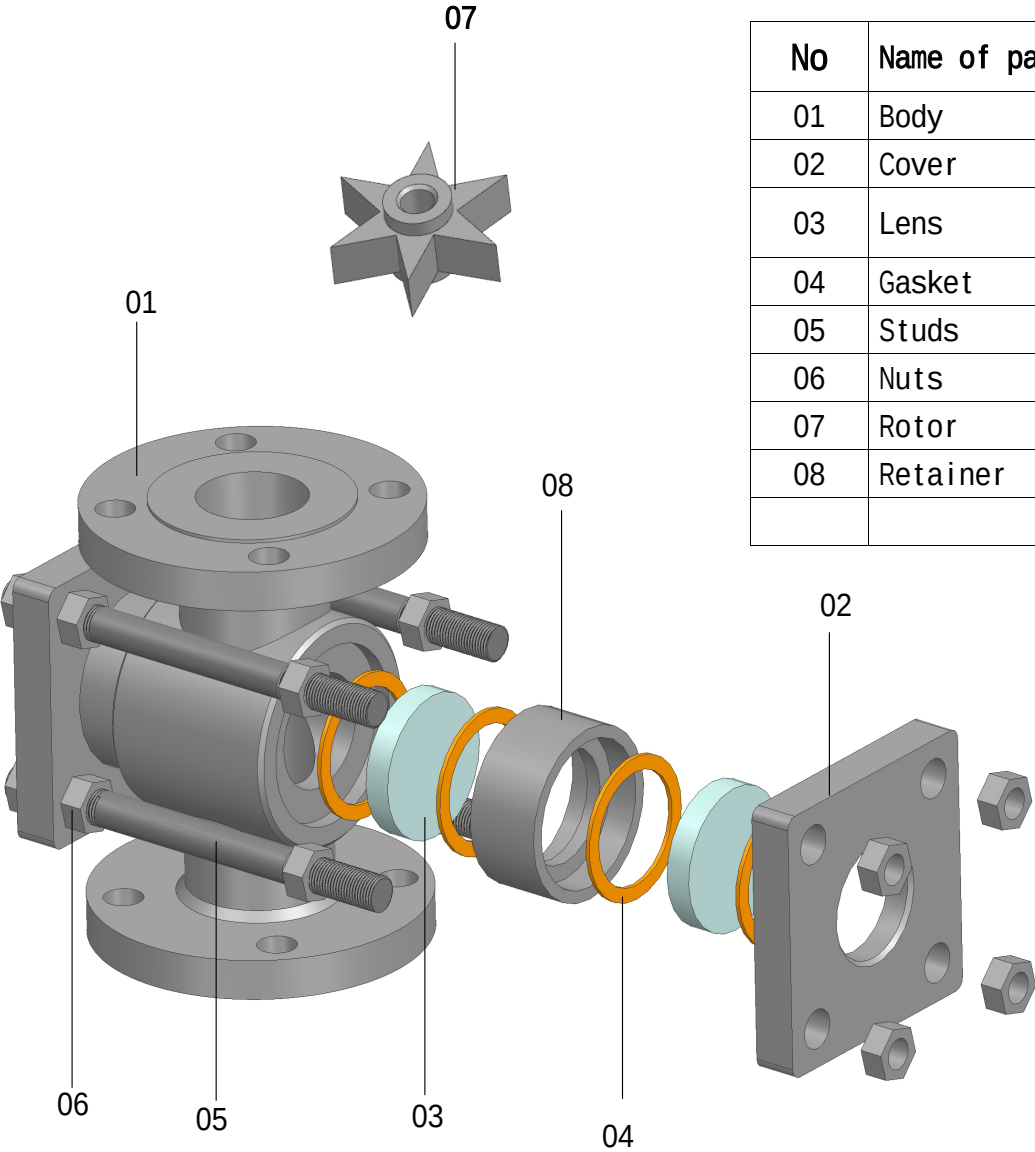

Lumistar Special Glass Technology Co., Ltd.
Sophia
Email: sophia@js-lumiglas.com

TAG: 522-8J80-SP-A-073, 522-8K80-SP-A-073